


CASTOR- Lamellenhut

Der Lamellenhut ist aufgrund seiner ansprechenden Form nicht mehr wegzudenken.

Der CASTOR- Lamellenhut wird in Form und Funktion heutigen Anforderungen in hohem Masse gerecht.

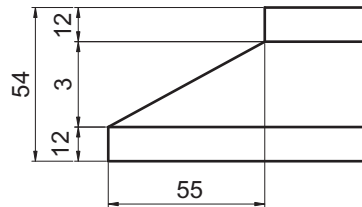

NW	Lamellen Ø aussen	Lamellen Ø innen	Anzahl Lamellen	Höhe	Stutzen
100	208	96	4	265	3
125	235	121	4	265	3
150	260	146	4	265	3
160	270	156	4	265	3
180	290	176	4	265	3
200	310	196	4	265	3
224	334	220	5	325	3
250	360	246	5	325	3
280	390	276	5	325	3
300	410	296	5	325	3
315	425	311	5	325	3
350	460	346	5	325	3
355	465	351	5	325	3
400	510	396	6	385	5
450	560	446	6	385	5
500	610	496	6	385	5
550	660	546	6	385	6
560	670	556	7	445	6
600	710	596	7	445	6
630	740	626	7	445	6
650	760	646	7	445	6
700	810	696	8	505	6
710	820	706	8	505	6
750	860	746	8	505	6
800	910	796	8	505	6
850	960	846	9	565	6
900	1010	896	9	565	8
950	1060	946	10	625	8
1000	1110	996	10	625	8



Ohnsorg

Ohnsorg Söhne AG
Kamin- und Ventilationshüte
Knonauerstrasse 5
6312 Steinhausen

Telefon 041 / 747 00 22
Telefax 041 / 747 00 29
www.oh-dachaustritte.ch
sales@oh-dachaustritte.ch


Ausschreibungstext:

CASTOR- Lamellenhut aus Kupfer
 Typ CRL NW Ø 315 mm
 mit Standrohr 1000 mm lang
 inkl. Schutzgitter aus Cr.Ni.Stahl
 Fabrikat: Ohnsorg


Querschnittverhältnis Rohr/Hut

NW	Rohr- Querschnitt	Hut- Querschnitt	Faktor Rohr/Hut
100	7'854 mm ²	61'889 mm ²	7.88
125	12'272 mm ²	77'361 mm ²	6.31
150	17'671 mm ²	92'865 mm ²	5.26
160	20'106 mm ²	99'022 mm ²	4.93
180	25'447 mm ²	111'400 mm ²	4.38
200	31'416 mm ²	123'778 mm ²	3.94
224	39'408 mm ²	168'891 mm ²	4.29
250	49'087 mm ²	188'495 mm ²	3.84
280	61'575 mm ²	211'114 mm ²	3.43
300	70'686 mm ²	226'194 mm ²	3.21
315	77'931 mm ²	237'504 mm ²	3.05
350	96'211 mm ²	263'760 mm ²	2.74
355	98'980 mm ²	267'663 mm ²	2.71
400	125'664 mm ²	355'628 mm ²	2.83
450	159'043 mm ²	400'081 mm ²	2.52
500	196'350 mm ²	444'535 mm ²	2.26
550	237'583 mm ²	488'988 mm ²	2.06
560	246'301 mm ²	573'528 mm ²	2.33
600	282'743 mm ²	614'494 mm ²	2.17
630	311'725 mm ²	645'219 mm ²	2.07
650	331'831 mm ²	665'702 mm ²	2.01
700	384'845 mm ²	811'472 mm ²	2.11
710	395'919 mm ²	823'065 mm ²	2.08
750	441'786 mm ²	869'434 mm ²	1.97
800	477'836 mm ²	927'396 mm ²	1.94
850	567'450 mm ²	1'100'184 mm ²	1.94
900	636'173 mm ²	1'164'901 mm ²	1.83
950	708'822 mm ²	1'357'952 mm ²	1.92
1000	785'398 mm ²	1'429'423 mm ²	1.82


Varianten:




Typ CRL



Typ CT 500



Typ CRLD



Typ CRLD-S



Ohnsorg

Ohnsorg Söhne AG
 Kamin- und Ventilationshüte
 Knonauerstrasse 5
 6312 Steinhausen

Telefon 041 / 747 00 22
 Telefax 041 / 747 00 29
 www.oh-dachaustritte.ch
 sales@oh-dachaustritte.ch